

BETOCAST

NEW GENERATION RETAINING WALL



 **KAMBETON**

[f /kambetonkurumsal](https://www.facebook.com/kambetonkurumsal) [i /kambeton](https://www.instagram.com/kambeton) [t /KambetonAS](https://www.twitter.com/KambetonAS)




KAMBETON

Head Office: Güzel Cumhuriyet Mahallesi
İncirlik Bulvarı No:390 /Z-01 Yüreğir / ADANA
Tel: +90 322 346 00 01 | **Fax:** +90 322 346 00 58

Branch: Belkis Köyü Belkis Sokak
No: 50 Nizip / GAZİANTEP
Tel: +90 342 526 11 35 | **Fax:** +90 342 526 11 35

Branch: Oyali OSB Mahallesi, 19. Sokak
No: 2A Eğil / DİYARBAKIR
Tel: +90 850 346 00 21

www.kambeton.com.tr | kambeton@kambeton.com.tr

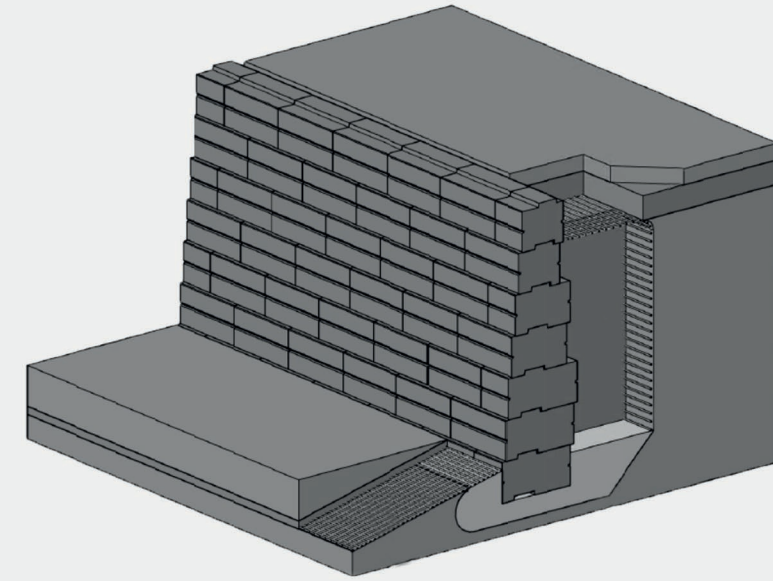

It is a very fast method for constructing retaining walls. As no preparations are needed in advance, the site duration is limited to the installation time.

Betocast is produced by dry-pour concrete which has a much higher strength. It offers a more durable solution in frost-prone areas.

No foundation or reinforcement is required. Ground pressure is countered by the mass of the concrete itself.



▲ Betocast is a registered retaining wall element developed by Kambeton.

▲ Retaining structures damaged by natural disasters such as floods and landslides can be quickly rebuilt with Betocast.


▲ Installation can be easily done with two people and a simple construction machine, which is a strong advantage in remote work sites with limited access to materials and work force.

Hızlı

Sağlam


Pratik

BETOCAST 60

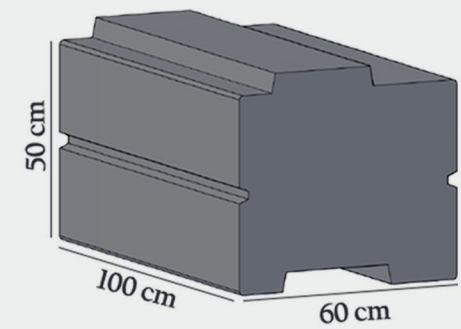


Weight: 714 kg

BETOCAST 80

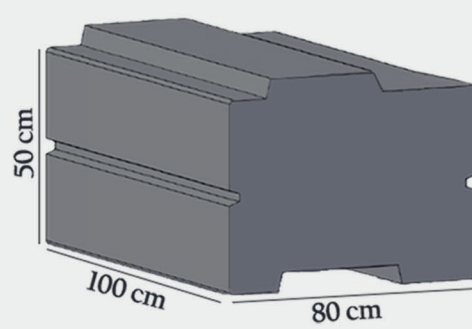

Weight: 954 kg

BETOCAST 100

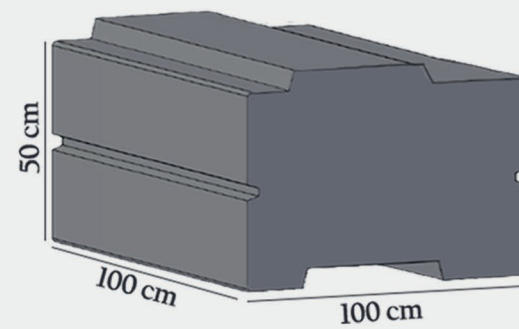

Weight: 1.194 kg

It can be produced in lengths of 100 cm and 50 cm.

